



UNBEATABLE TOUGHNESS

LEADING MANUFACTURER OF ROCK BREAKER



Best In Class:
Power to Weight Ratio



Enhanced
Durability




Easy
Maintenance



Optimum
Productivity



DESIGN & FEATURES

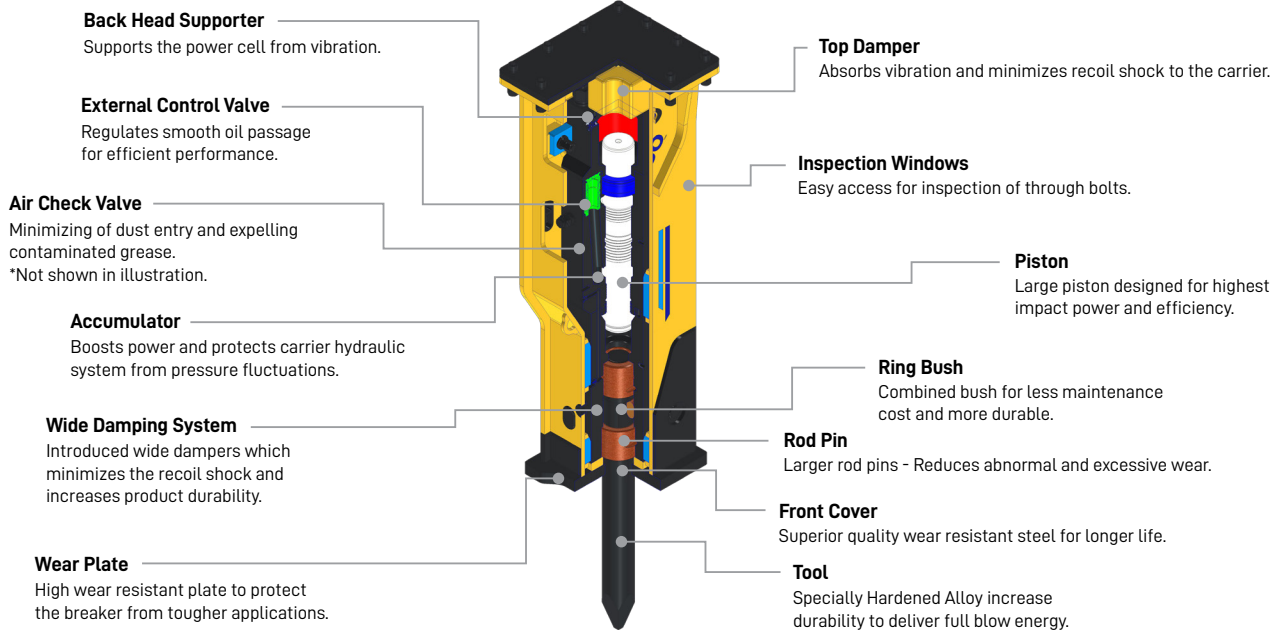

SPECIFICATIONS

	Applications			Primary / Secondary Breaking, Tunneling Job, Reinforced Concrete Breaking, etc.
	Applicable Machines			Medium Range Excavators : 10-26 Tons Class
	Model	Unit		DOZCO 1000A
Specifications	Operating Weight	Box		1025
		Side	Kg	-
		Top Split		1007
	Height (Inc. Tool)	Box		2338
		Side	mm	-
		Top Split		2342
	Tool Diameter		mm	110
	Tool Length		mm	1000
	Optimal Oil Flow		lpm	90 - 120
	Setting Pressure		bar	200
	Operating Pressure		bar	150 - 180
	Return Line Pressure		bar	10
	Impact Rate		BPM	350 - 650
	Bottom Plate Thickness (HB)		mm	40
Sallent Features	Hose	In & Out	Inch	3/4
	Control Valve Type			Internal
	Applicable Carrier		ton	12 ~ 16
	2 Stroke Control		-	No
	Accumulator		-	No
	Auto Greasing		-	Optional
	Anti Blank Firing (ABF)		-	No



DOZCO (INDIA) PVT. LTD.
CONSTRUCTION & MINING - EQUIPMENT & PARTS

CORPORATE OFFICE:

No. 243, D - Block, IDA, Auto Nagar,
Vishakapatnam- 530 012, India.
Tel: +91 891 276 9681 | Email: info@dozco.com

REGISTERED OFFICE:

No. 6, Waterloo Street, 3rd Floor,
Kolkata- 700 069, West Bengal, India.

MANUFACTURING PLANT:

Plot No. 90 & 91, G-Block, Auto Nagar,
Visakhapatnam- 530 012, India.