

LEADING MANUFACTURER OF ROCK BREAKER



Best In Class: Power to Weight Ratio



Enhanced Durability



Easy Maintenance




Optimum Productivity





DESIGN & FEATURES

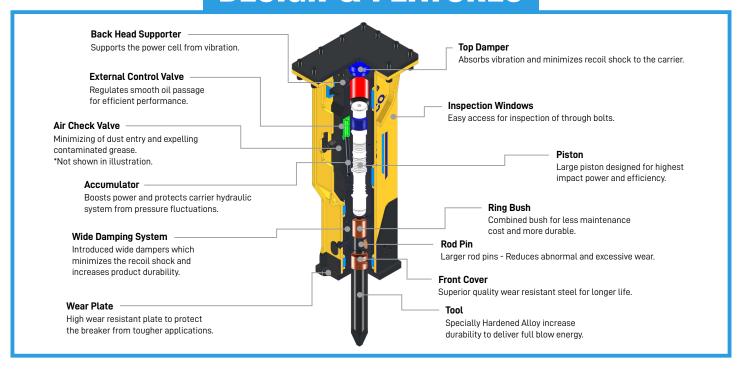

SPECIFICATIONS

	Applications			Demolition, Agricture, Trenching, Breaking Asphalt and Concrete etc.
	Applicable Machines			Mini-Excavators, Backhoes, Skid Steer Loader
	Model		Unit	DOZCO 450A
Specifications	Operating Weight	Box	Kg	632
		Side		-
		Top Split		-
	Height (Inc. Tool)	Box	mm	2053
		Side		-
		Top Split		-
	Tool Diameter		mm	85
	Tool Length		mm	800
	Optimal Oil Flow		lpm	60 - 100
	Setting Pressure		bar	160 ~ 180
	Operating Pressure		bar	130 - 160
	Return Line Pressure		bar	10
	Impact Rate		BPM	400 - 800
	Bottom Plate Thickness (HB)		mm	30
	Control Valve Type			Internal
	Applicable Carrier		ton	6~9
Salient Features	2 Stroke Control		-	No
	Accumulator		-	No
	Auto Greasing		-	Optional
	Anti Blank Firing (ABF)		-	No





DOZCO (INDIA) PVT. LTD.

CONSTRUCTION & MINING - EQUIPMENT & PARTS

CORPORATE OFFICE:

No. 243, D - Block, IDA, Auto Nagar, Vishakapatnam- 530 012, India. Tel: +91 891 276 9681 | Email: info@dozco.com

REGISTERED OFFICE:

No. 6, Waterloo Street, 3rd Floor, Kolkata-700 069, West Bengal, India.

MANUFACTURING PLANT:

Plot No. 90 & 91, G-Block, Auto Nagar,

Follow Us: (in (ii) D (iii) (iii)









| www.dozco.com

Visakhapatnam- 530 012, India.