



UNBEATABLE TOUGHNESS

LEADING MANUFACTURER OF ROCK BREAKER



Best In Class:
Power to Weight Ratio



Enhanced
Durability




Easy
Maintenance



Optimum
Productivity



DESIGN & FEATURES

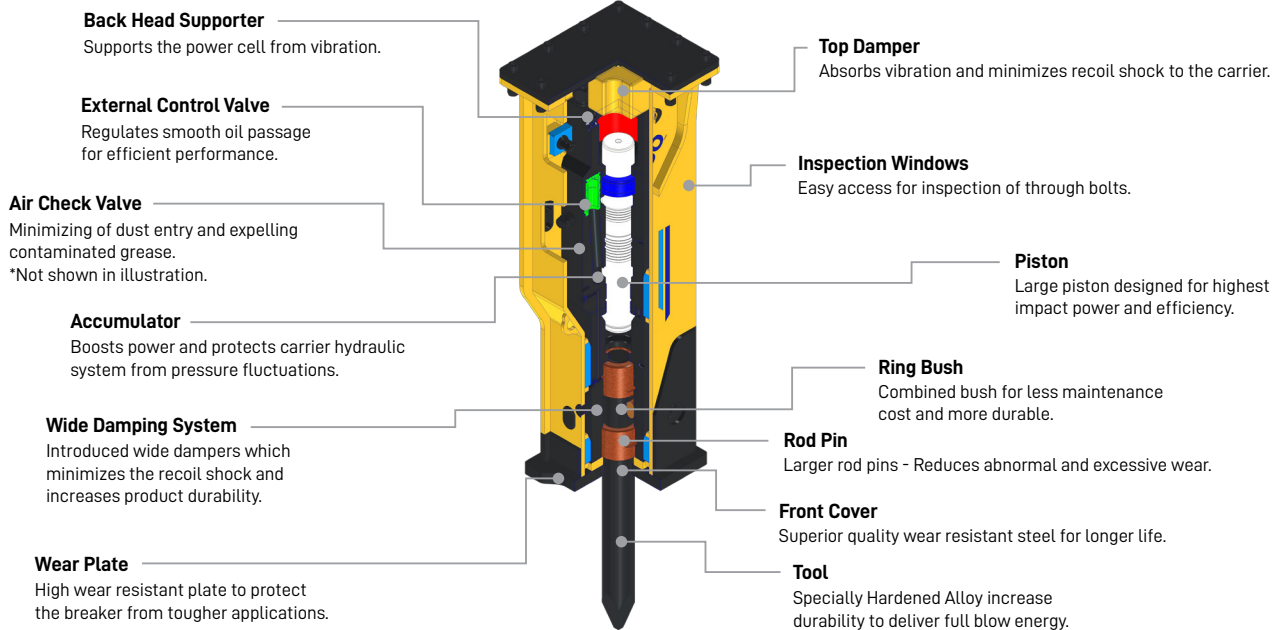

SPECIFICATIONS

	Applications			Primary / Secondary Breaking, Tunneling Job, Reinforced Concrete Breaking, etc.
	Applicable Machines			Medium Range Excavators : 10-26 Tons Class
	Model	Unit	DOZCO 800A	
Specifications	Operating Weight	Box	989	
		Side	899	
		Top Split	977	
	Height (Inc. Tool)	Box	2396	
		Side	2050	
		Top Split	2342	
	Tool Diameter		mm	100
	Tool Length		mm	1000
	Optimal Oil Flow		lpm	80 - 110
	Setting Pressure		bar	200
	Operating Pressure		bar	140 - 170
	Return Line Pressure		bar	10
	Impact Rate		BPM	350 - 700
	Bottom Plate Thickness (HB)		mm	40
Sallent Features	Hose	In & Out	Inch	3/4
	Control Valve Type		Internal	
	Applicable Carrier		ton	10 ~ 14
	2 Stroke Control		-	No
	Accumulator		-	No
	Auto Greasing		-	Optional
		Anti Blank Firing (ABF)		No



DOZCO (INDIA) PVT. LTD.
CONSTRUCTION & MINING - EQUIPMENT & PARTS

CORPORATE OFFICE:

No. 243, D - Block, IDA, Auto Nagar,
Vishakapatnam- 530 012, India.
Tel: +91 891 276 9681 | Email: info@dozco.com

REGISTERED OFFICE:

No. 6, Waterloo Street, 3rd Floor,
Kolkata- 700 069, West Bengal, India.

MANUFACTURING PLANT:

Plot No. 90 & 91, G-Block, Auto Nagar,
Visakhapatnam- 530 012, India.